

## → 简介

/

( )

## → 技术参数

防爆等级: [Ex ia Ga] IIC [Ex ia Da] IIIC

供电电源:

(14+ 15-)

18V DC ~ 60V DC ( 24V DC)

输入信号类型 (1 2 3 4 5 6):

允许引线电阻:  $\leq 20 \Omega$

输出信号类型 (7 8 9 10 11 12):

4 mA ~ 20 mA 20 ~ 4 mA

0(4) mA ~ 20 mA 0 mA ~ 10 mA 20 ~ 4 mA

0(1) V ~ 5 V 0 V ~ 10 V

4 ~ 20 mA

NAMUR NE43

输出纹波:  $\leq 5 \text{ mV}_{\text{rms}}$  ( 250  $\Omega$ )

负载能力:


$R_L \leq [(U-3)/0.02] \Omega$  U

0(4) mA ~ 20 mA 20 ~ 4 mA 0 mA ~ 10 mA 20 ~ 4 mA

0(1) V ~ 5 V:  $\geq 1 \text{ M}\Omega$  0 V ~ 10 V:  $\geq 2 \text{ M}\Omega$

隔离传输准确度 (25 °C  $\pm$  2 °C 不含冷端补偿):

C



→ 外形结构

× × : 17.8mm×110mm×117mm

→ 面板显示

- PWR: ( )
- CH1 CH2: ( )
  - 1 2 LED
  - LED RTD ( )
  - LED TC LED

→ 编程及校准

- 
- 
- 
- 

→ 注意事项

- IP20 ( )
- IEC/EN 60664-1 2
- IEC 61000-4
- 
- 

→ 补充说明

- 


→ 应用

/

/

/

- A. BUS DIN 35
- D.
- 

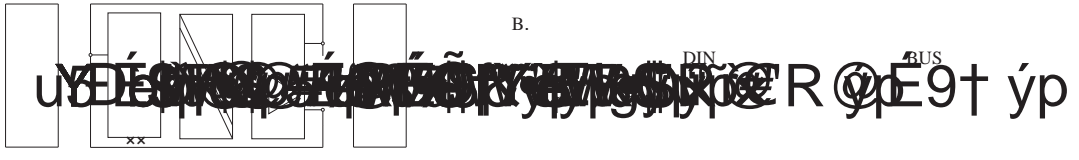

→ BUS规格

→ 安装

- DIN IEC 60715 35mm
- C.